



## YDS-MFB23-IMX678 V1.0

### 8.40MP Sony IMX678 MIPI Interface M12 Fixed Focus Camera Module

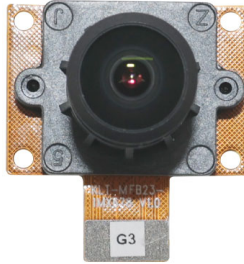

Front View

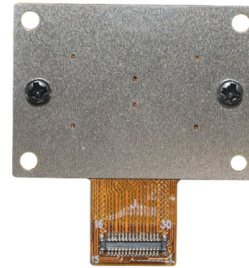

Back View

#### Specifications

<b>Camera Module No.</b>	<b>YDS-MFB23-IMX678 V1.0</b>
<b>Resolution</b>	8.40MP
<b>Image Sensor</b>	IMX678
<b>Sensor Type</b>	1/1.8"
<b>Pixel Size</b>	2.0 um x 2.0 um
<b>EFL</b>	4.00 mm
<b>F.NO</b>	2.00
<b>Pixel</b>	3856 x 2200
<b>View Angle</b>	135.0°(DFOV) 110.0°(HFOV) 72.0°(VFOV)
<b>Lens Dimensions</b>	20.00 x 20.00 x 24.50 mm
<b>Module Size</b>	30.05 x 28.00 mm
<b>Module Type</b>	Fixed Focus
<b>Interface</b>	MIPI
<b>Auto Focus VCM Driver IC</b>	None
<b>Lens Type</b>	650nm IR Cut
<b>Operating Temperature</b>	-30°C to +85°C
<b>Mating Connector</b>	OK-14F030-04



## YDS-MFB23-IMX678 V1.0

### 8.40MP Sony IMX678 MIPI Interface M12 Fixed Focus Camera Module




Top View




Side View




Bottom View

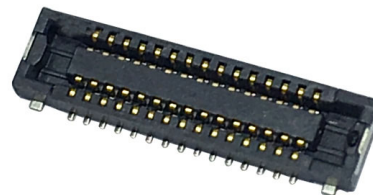

Mating Connector

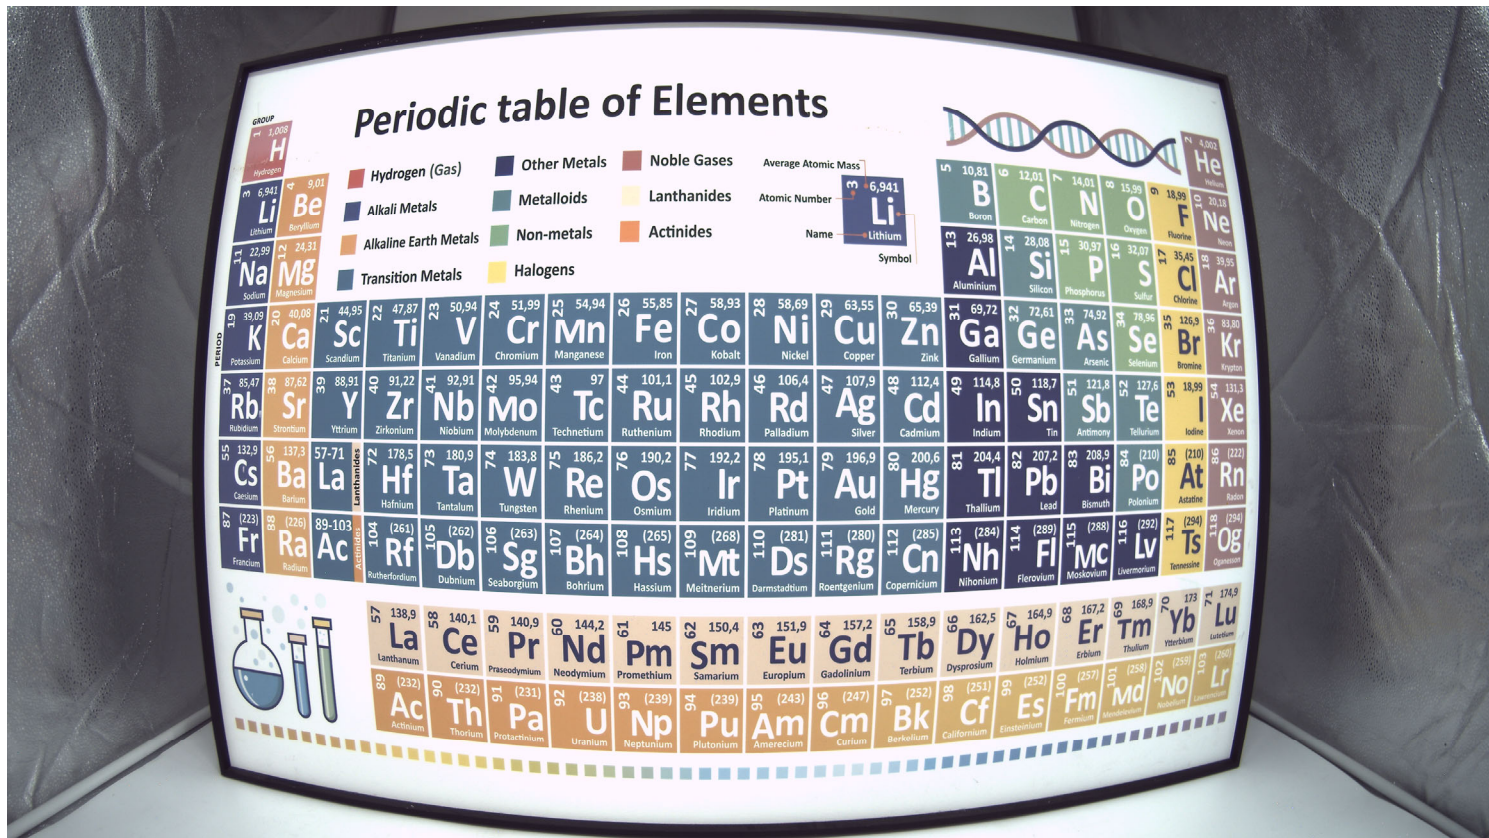




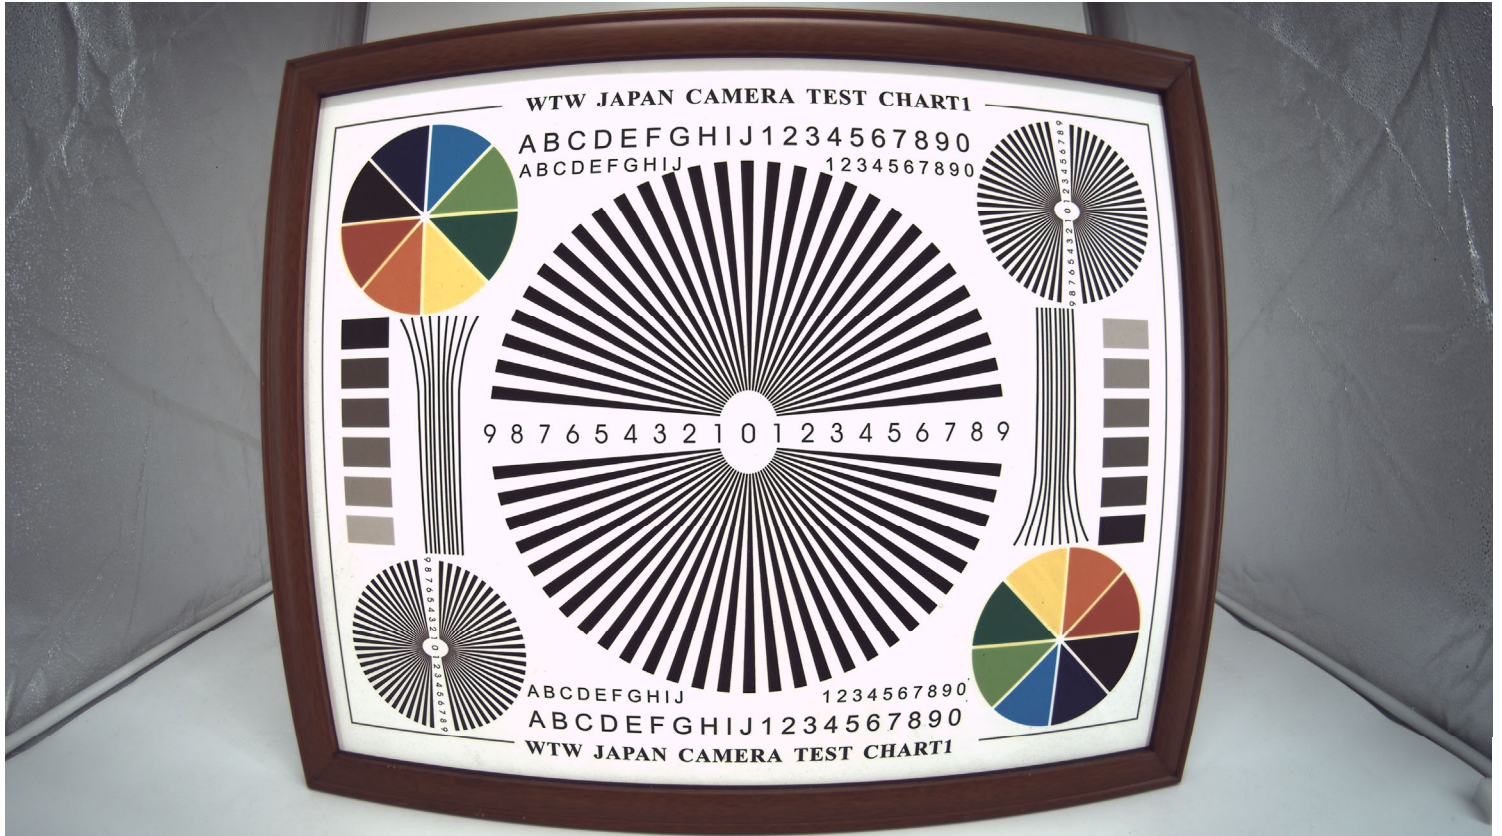


RoHS	
PIN	SIGNAL
1	DGND
2	NC
3	SDA
4	XMASTER
5	DOVDD 1.8V
6	SCL
7	AGND
8	XHS
9	AVDD 3.3V
10	DVDD 1.1V
11	XVS
12	XSHUTDOWN
13	DGND
14	MCLK
15	DGND
16	MDP1
17	MDN1
18	DGND
19	MDP4
20	MDN4
21	DGND
22	MCP
23	MCN
24	DGND
25	MDP2
26	MDN2
27	DGND
28	MDP3
29	MDN3
30	DGND


Version	Information
V1.0	First Version

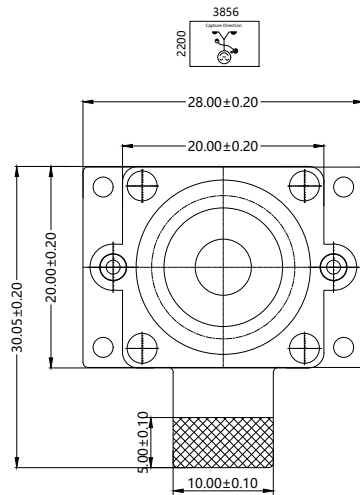

TOP VIEW

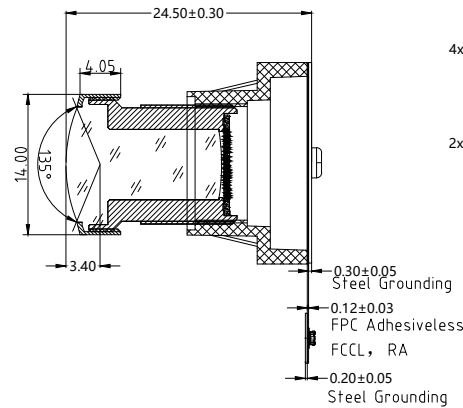

SIDE VIEW

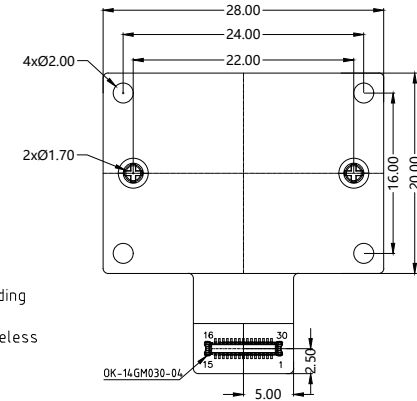

BOTTOM VIEW

**NOTE:**

1.The device slave address:0x34;

**Parameters:**

**1、 Sensor specification:**

Image Sensor: IMX678-AAQR1-C

Pixel: 2.0um\*2.0um

Lens Type: 1/1.8

Important Voltage Description:

DVDD1.1V (external power supply);

**2、 Lens specification:**

FOV: 135°(D),110°(H),72°(V)

F/NO.: 2.0

TV distortion: <-35%(V)

Focal length: 4mm

Composition: 6G+IR FILTER

IR Cut Coating: 650nm+850nm

[www.YDSCAM.com](http://www.YDSCAM.com)

Designed By

Kevin


Model Name:

YDS-MFB23-IMX678 V1.0

Checked By

Jacky

Projection Type:



Unit:

mm  
Scale: 1:1

Date:

3/16/2026  
Sheet: 1 of 1

Version:

1/0

## [Product Information]

# IMX678-AAQR1

Ver.1.0

Diagonal 8.86 mm (Type 1/1.8) CMOS Solid-state Image Sensor with Square Pixel for Color Cameras

### Description

The IMX678-AAQR1 is a diagonal 8.86 mm (Type 1/1.8) CMOS active pixel type solid-state image sensor with a square pixel array and 8.40 M effective pixels. This chip operates with analog 3.3 V, digital 1.1 V, and interface 1.8 V triple power supply, and has low power consumption. High sensitivity, low dark current and no smear are achieved through the adoption of R, G and B primary color mosaic filters. This chip features an electronic shutter with variable charge-integration time.

(Applications: Security cameras)

### Features

- ◆ CMOS active pixel type dots
- ◆ Built-in timing adjustment circuit, H/V driver and serial communication circuit
- ◆ Input frequency: 13.5MHz / 18MHz / 24MHz / 27MHz / 36MHz / 37.125 MHz / 72 MHz / 74.25 MHz
- ◆ Number of recommended recording pixels: 3840 (H) × 2160 (V) approx. 8.29M pixel
- ◆ Readout mode
  - All-pixel scan mode
  - Horizontal / Vertical 2/2-line binning mode
  - Window cropping mode
  - Horizontal / Vertical direction - Normal / Inverted readout mode
- ◆ Readout rate
  - Maximum frame rate in All-pixel scan mode: 12 bit: 60 frame/s, 10 bit: 60 frame/s
- ◆ High dynamic range (HDR) function
  - Digital overlap HDR
  - Clear HDR
- ◆ Synchronizing sensors function
- ◆ Variable-speed shutter function (resolution 1H units)
- ◆ CDS / PGA function
  - 0 dB to 30 dB: Analog Gain 30 dB (step pitch 0.3 dB)
  - 30.3 dB to 72 dB: Analog Gain 30 dB + Digital Gain 0.3 dB to 42 dB (step pitch 0.3 dB)
- ◆ Supports I/O
  - CSI-2 serial data output (2 Lane / 4 Lane / 8Lane / 4Lane × 2ch)
  - RAW10 / RAW12 output

## STARVIS 2

\* STARVIS 2 is a registered trademark or trademark of Sony Group Corporation or its affiliates. The STARVIS 2 is back-illuminated pixel technology used in CMOS image sensors for security camera applications. It features a sensitivity of 2000 mV or more per 1  $\mu\text{m}^2$  (color product, when imaging with a 706 cd/m<sup>2</sup> light source, F5.6 in 1 s accumulation equivalent). It also has a wide dynamic range (AD 12 bit) of more than 8 dB compared to STARVIS for the same pixel size in a single exposure, and achieves high picture quality in the visible-light and near infrared light regions.

Sony reserves the right to change products and specifications without prior notice.

"Sony", "SONY" logo are registered trademarks or trademarks of Sony Group Corporation or its affiliates.

**Device Structure**

- ◆ CMOS image sensor
- ◆ Image size Diagonal 8.86 mm (Type 1/1.8) approx. 8.40 M pixels, All pixels
- ◆ Total number of pixels 3856 (H) × 2200 (V) approx. 8.48 M pixels
- ◆ Number of effective pixels 3856 (H) × 2180 (V) approx. 8.40 M pixels
- ◆ Number of active pixels 3856 (H) × 2176 (V) approx. 8.39 M pixels
- ◆ Number of recommended recording pixels 3840 (H) × 2160 (V) approx. 8.29 M pixels
- ◆ Unit cell size 2.0 μm (H) × 2.0 μm (V)
- ◆ Optical black  
Horizontal (H) direction: Front 0 pixels, rear 0 pixels  
Vertical (V) direction: Front 20 pixels, rear 0 pixels
- ◆ Dummy  
Horizontal (H) direction: Front 0 pixels, rear 0 pixels  
Vertical (V) direction: Front 0 pixels, rear 0 pixels
- ◆ Package 132 pin LGA

**Image Sensor Characteristics**

(Tj = 60 °C)

Item		Value	Remarks
Sensitivity (F5.6)	Typ.	15886 Digit/lx/s	12 bit converted value
Saturation signal	Min.	3895 Dight	12 bit converted value

**Basic Drive Mode**

Drive mode	Recommended number of recording pixels	Maximum frame rate [frame/s]	Output interface	ADC [bit]
All-pixel	3840 (H) × 2160 (V) approx. 8.29 M pixels	60	CSI-2	10
Horizontal/ Vertical 2/2-line binning	1920 (H) × 1080 (V) approx. 2.07 M pixels	60	CSI-2	10

**Comparison Image under 0.2 lux**

Gain setting of IMX334 is 4times of IMX678, however they can get same output brightness.



IMX334


Condition: F1.6, exposure time 33.3 ms, gain 60 dB



IMX678

Condition: F1.6, exposure time 33.3 ms, gain 48 dB

**Comparison Image under NIR at 850 nm**

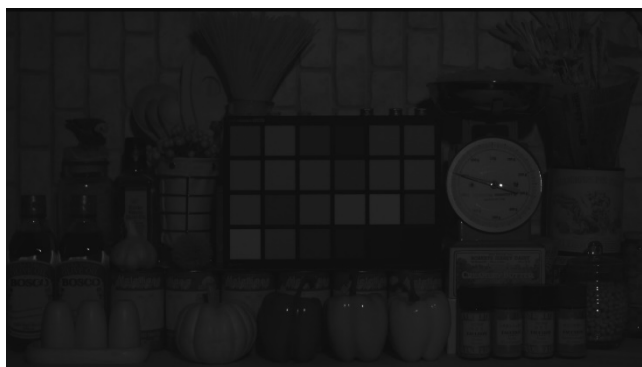

IMX334



Condition: F1.6, exposure time 33.3 ms, gain 0 dB



IMX678

Condition: F1.6, exposure time 33.3 ms, gain 0 dB


REV	ECN NO	DRA	APPD	DATE
A	FIRST RELEASE	George Gao	Huinan Zhou	2013.09.18
B	SECOND VERSIONS	George Gao	Huinan Zhou	2015.10.22

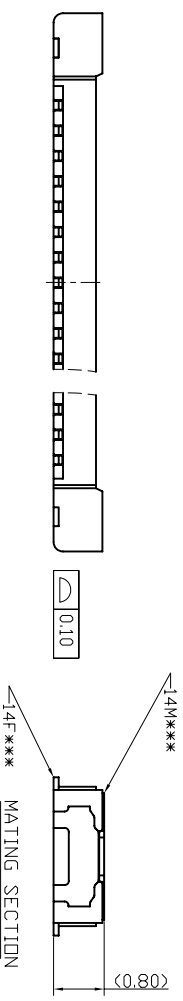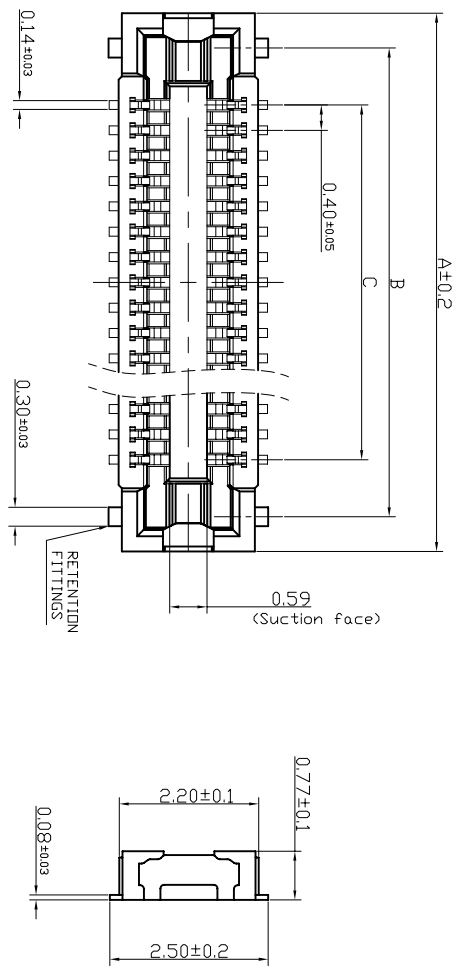

- 3) Characteristics:
- 3-1. Rated voltage: 60V AC/DC
  - 3-2. Rated current: 0.3A/contact (Max. 5A at total contact)
  - 3-3. Insulation resistance: Min. 1000MΩ (initial)
  - 3-4. Breakdown voltage: 150V AC for 1 min.
  - 3-5. Saltwater spray resistance (header and socket mated): 24 hours, insulation resistance min. 100MΩ, contact resistance max. 90mΩ
  - 3-6. Contact resistance: Max. 90mΩ
  - 3-7. Ambient temperature: -55℃~+85℃
  - 3-8. Storage temperature: -55℃~+85℃ (product only); -40℃~+50℃ (emboss packing)
  - 3-9. Composite insertion force: Max. 0.981N/contacts X contacts (initial)
  - 3-10. Composite removal force: Min. 0.165N/contacts X contacts
  - 3-11. Post holding force: Min. 0.49N/contacts
  - 3-12. Insertion and removal life: 50 times

TABLE:

70	16.50	15.40	13.60
50	12.50	11.40	9.60
40	10.50	9.40	7.60
34	9.30	8.20	6.40
30	8.50	7.40	5.60
24	7.30	6.20	4.40
16	5.70	4.60	2.80
12	4.90	3.80	2.00
10	4.50	3.40	1.60
NUMBER DF CONTACTS	A	B	C

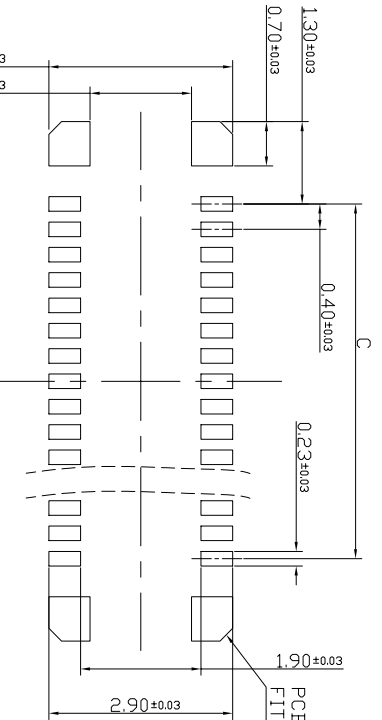

RECOMMENDED PCB LAYOUT

OK-14F\*\*\*-04

SOCKET  
PITCH-0.4MM  
NUMBER DF CONTACTS



DIMENSION IN MM		TOLERANCE UNLESS OTHERWISE SPECIFIED	
. ±0.20	. ±2°	. ±0.10	. 0 ±1°
.00 ±0.05	.00 ±0.5°	.000 ±0.03	.000 ±0.3°

APPRO:	TITLE:	0.4MM BTB (MATING HEIGHT 0.8H)	
CHKD:	DWG NO.:	OK-14F***-04	
DRAW:	PROJ:	Q'TY	SIZE
George Gao	2015.10.22	--	A4
		SHEET	SCALE
		1/1	1:1
		REV	B

REV	ECN NO	DRA	APPD	DATE
A	FIRST RELEASE	George Gao	Hunan Zhou	2013.09.12

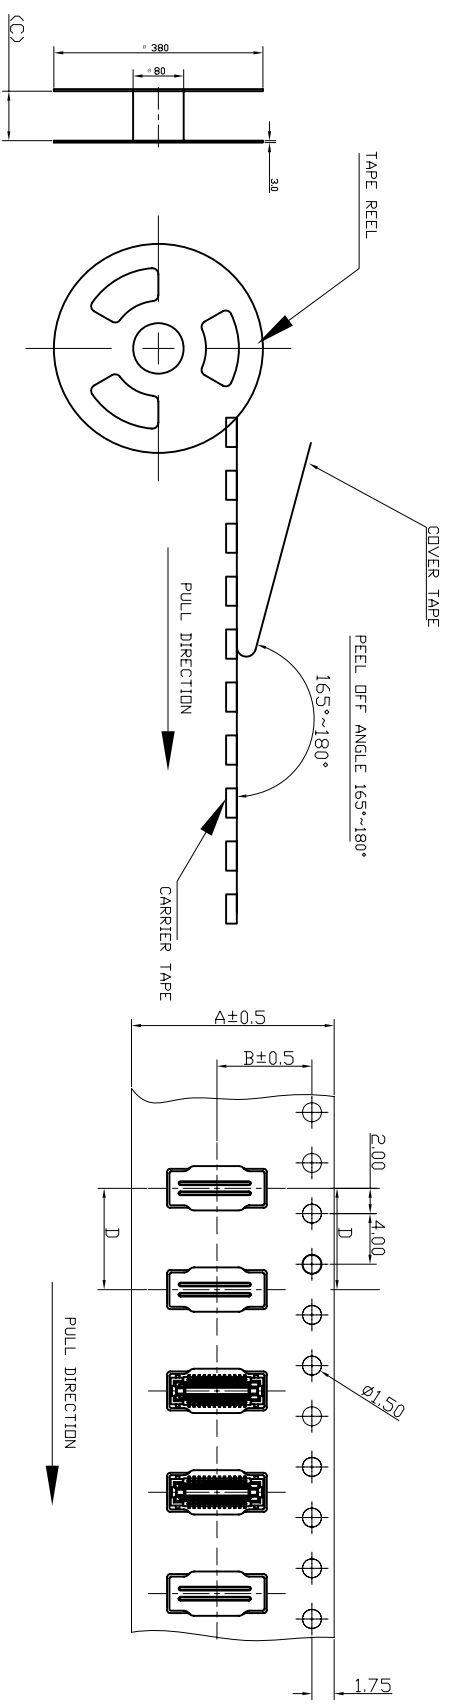


TABLE:

70			8.00	10000
50	24.00	11.50	8.00	10000
40	24.00	11.50	8.00	10000
34			4.00	20000
30			4.00	20000
24			8.00	10000
16	16.00	7.50	8.00	10000
12			8.00	10000
10			8.00	10000

DIMENTION IN mm		TOLERANCE UNLESS OTHERWISE SPECIFIED	
. ± 0.20	. ± 2°	. ± 0.10	. ± 1°
.0 ± 0.05	.00 ± 0.5°	.00 ± 0.03	.000 ± 0.3°
<b>OCN</b> 芯奇科技 OCN TECHNOLOGY		TITLE: 0.4MM BTB (MATING HEIGHT 0.8H) DWG NO.: OK-14F***-04	
APPR: _____	CHKD: _____	DRAW: George Gao	PROU: _____
2013.09.18		SIZE: A4	SHEET: 1/1
		SCALE: 1:1	REV: A

## Cameras Applications



Automotive Driver Pilot




Live Streaming



Video Conference



Eye Tracker Biometric Detection

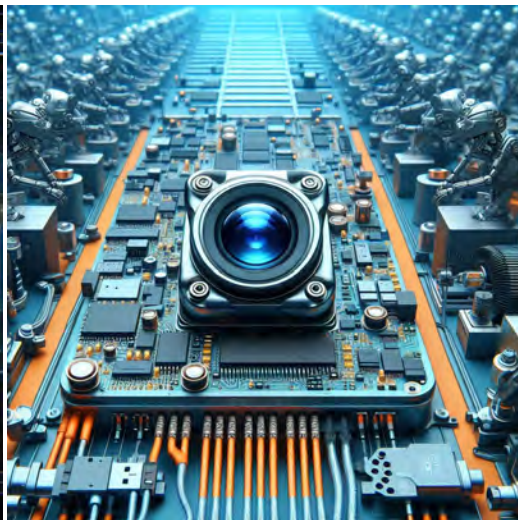

Machine Vision



Agricultural Monitor



Night Vision Security



Drone and Sports Eagle Eyes



Interactive Pet Camera



# YDS CAMERA MODULE

*your best camera partner*

## Camera Module Pinout Definition Reference Chart

OmniVision	Sony	Samsung	On-Semi	Aptina	Himax	GalaxyCore	PixArt	SmartSens	Sensors
Pin Signal		Description							
DGND GND		ground for digital circuit							
AGND		ground for analog circuit							
PCLK DCK		DVP PCLK output							
XCLR PWDN XSHUTDOWN STANDBY		power down active high with internal pull-down resistor							
MCLK XVCLK XCLK INCK		system input clock							
RESET RST		reset active low with internal pull-up resistor							
NC NULL		no connect							
SDA SIO_D SIOD		SCCB data							
SCL SIO_C SIOC		SCCB input clock							
VSYNC XVS FSYNC		DVP VSYNC output							
HREF XHS		DVP HREF output							
DOVDD		power for I/O circuit							
AFVDD		power for VCM circuit							
AVDD		power for analog circuit							
DVDD		power for digital circuit							
STROBE FSTROBE		strobe output							
FSIN		synchronize the VSYNC signal from the other sensor							
SID		SCCB last bit ID input							
ILPWM		mechanical shutter output indicator							
FREQ		frame exposure / mechanical shutter							
GPIO		general purpose inputs							
SLASEL		I2C slave address select							
AFEN		CEN chip enable active high on VCM driver IC							
<b>MIPI Interface</b>									
MDN0 DN0 MD0N DATA_N DMO1N		MIPI 1st data lane negative output							
MDP0 DP0 MD0P DATA_P DMO1P		MIPI 1st data lane positive output							
MDN1 DN1 MD1N DATA2_N DMO2N		MIPI 2nd data lane negative output							
MDP1 DP1 MD1P DATA2_P DMO2P		MIPI 2nd data lane positive output							
MDN2 DN2 MD2N DATA3_N DMO3N		MIPI 3rd data lane negative output							
MDP2 DP2 MD2P DATA3_P DMO3P		MIPI 3rd data lane positive output							
MDN3 DN3 MD3N DATA4_N DMO4N		MIPI 4th data lane negative output							
MDP3 DP3 MD3P DATA4_P DMO4P		MIPI 4th data lane positive output							
MCN CLKN CLK_N DCKN		MIPI clock negative output							
MCP CLKP MCP CLK_P DCKN		MIPI clock positive output							
<b>DVP Parallel Interface</b>									
D0 DO0 Y0		DVP data output port 0							
D1 DO1 Y1		DVP data output port 1							
D2 DO2 Y2		DVP data output port 2							
D3 DO3 Y3		DVP data output port 3							
D4 DO4 Y4		DVP data output port 4							
D5 DO5 Y5		DVP data output port 5							
D6 DO6 Y6		DVP data output port 6							
D7 DO7 Y7		DVP data output port 7							
D8 DO8 Y8		DVP data output port 8							
D9 DO9 Y9		DVP data output port 9							
D10 DO10 Y10		DVP data output port 10							
D11 DO11 Y11		DVP data output port 11							

[www.YDSCAM.com](http://www.YDSCAM.com) [sales@ydscam.com](mailto:sales@ydscam.com) Phone (WeChat, QQ): (+86) 177 2732 6718

All rights reserved @ YingDeShun Co. Ltd. Specifications subject to change without notice.

## Camera Reliability Test

Reliability Inspection Item		Testing Method	Acceptance Criteria	
Category	Item			
Environmental	Storage Temperature	High 60°C 96 Hours	Temperature Chamber	No Abnormal Situation
		Low -20°C 96 Hours	Temperature Chamber	No Abnormal Situation
	Operation Temperature	High 60°C 24 Hours	Temperature Chamber	No Abnormal Situation
		Low -20°C 24 Hours	Temperature Chamber	No Abnormal Situation
	Humidity	60°C 80% 24 Hours	Temperature Chamber	No Abnormal Situation
	Thermal Shock	High 60°C 0.5 Hours Low -20°C 0.5 Hours Cycling in 24 Hours	Temperature Chamber	No Abnormal Situation
Physical	Drop Test (Free Falling)	Without Package 60cm	10 Times on Wood Floor	Electrically Functional
		With Package 60cm	10 Times on Wood Floor	Electrically Functional
	Vibration Test	50Hz X-Axis 2mm 30min	Vibration Table	Electrically Functional
		50Hz Y-Axis 2mm 30min	Vibration Table	Electrically Functional
		50Hz Z-Axis 2mm 30min	Vibration Table	Electrically Functional
	Cable Tensile Strength Test	Loading Weight 4 kg 60 Seconds Cycling in 24 Hours	Tensile Testing Machine	Electrically Functional
Electrical	ESD Test	Contact Discharge 2 KV	ESD Testing Machine	Electrically Functional
		Air Discharge 4 KV	ESD Testing Machine	Electrically Functional
	Aging Test	On/Off 30 Seconds Cycling in 24 Hours	Power Switch	Electrically Functional
	USB Connector	On/Off 250 Times	Plug and Unplug	Electrically Functional



## Camera Inspection Standard

Inspection Item		Inspection Method	Standard of Inspection		
Category	Item				
Appearance	FPC/ PCB	Color	The Naked Eye	Major Difference is Not Allowed.	
		Be Torn/Chopped	The Naked Eye	Copper Crack Exposure is Not Allowed.	
		Marking	The Naked Eye	Clear, Recognizable (Within 30cm Distance)	
	Holder	Scratches	The Naked Eye	The Inside Crack Exposure is Not Allowed	
		Gap	The Naked Eye	Meet the Height Standard	
		Screw	The Naked Eye	Make Sure Screws Are Presented (If Any)	
		Damage	The Naked Eye	The Inside Crack Exposure is Not Allowed	
	Lens	Scratch	The Naked Eye	No Effect On Resolution Standard	
		Contamination	The Naked Eye	No Effect On Resolution Standard	
		Oil Film	The Naked Eye	No Effect On Resolution Standard	
		Cover Tape	The Naked Eye	No Issue On Appearance.	
	Function	Image	No Communication	Test Board	Not Allowed
			Bright Pixel	Black Board	Not Allowed In the Image Center
Dark Pixel			White board	Not Allowed In the Image Center	
Blurry			The Naked Eye	Not Allowed	
No Image			The Naked Eye	Not Allowed	
Vertical Line			The Naked Eye	Not Allowed	
Horizontal Line			The Naked Eye	Not Allowed	
Light Leakage			The Naked Eye	Not Allowed	
Blinking Image			The Naked Eye	Not Allowed	
Bruise			Inspection Jig	Not Allowed	
Resolution			Chart	Follows Outgoing Inspection Chart Standard	
Color			The Naked Eye	No Issue	
Noise			The Naked Eye	Not Allowed	
Corner Dark			The Naked Eye	Less Than 100px By 100px	
Color Resolution			The Naked Eye	No Issue	
Dimension	Height	The Naked Eye	Follows Approval Data Sheet		
	Width	The Naked Eye	Follows Approval Data Sheet		
	Length	The Naked Eye	Follows Approval Data Sheet		
	Overall	The Naked Eye	Follows Approval Data Sheet		

## YDSCAM Package Solutions

YDS Camera Module




Complete with Lens Protection Film



Tray with Grid and Space




Place Cameras on the Tray

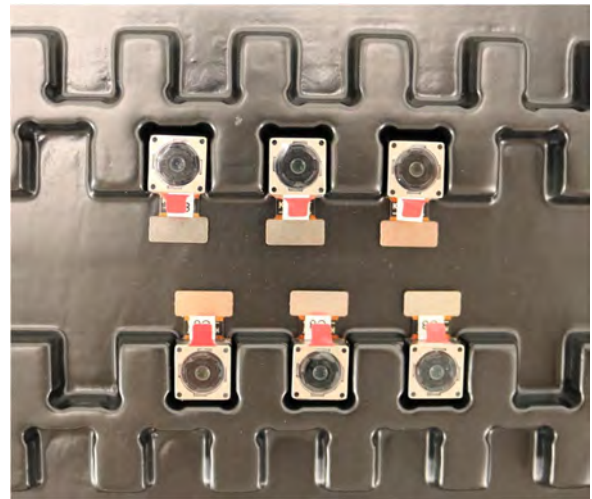


## YDSCAM Package Solutions

Full Tray of Cameras

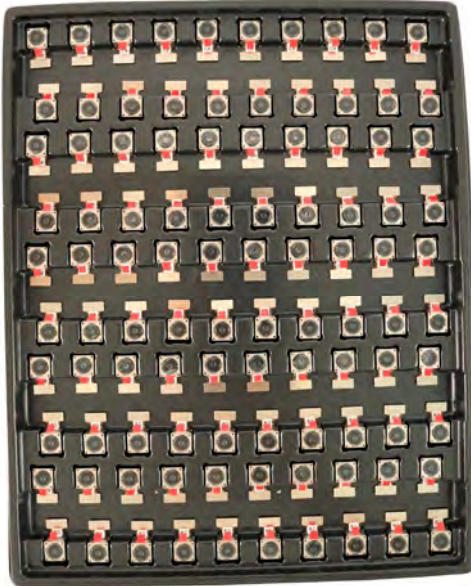

Cover Tray with Lid

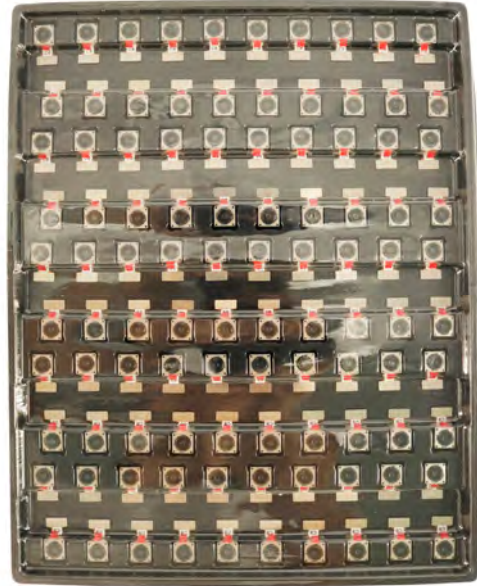

Place Tray into Anti-Static Bag



Vacuum the Anti-Static Bag



## YDSCAM Package Solutions

### Sealed Vacuum Anti-Static Bag with Labels

1. Model and Description 2. Quantity 3. Manufacturing Date Code 4. Caution



## YDSCAM Package Solutions

Place Foam Sheets Between Tray Bags



Foam Sheets are Larger Than Trays



Place Foam Sheets and Trays into Box



Foam Sheets are Tightly Fitting in Box



Seal the Carbon Box



Label the Carbon Shipping Box






## YDSCAM Package Solutions

USB Camera Module

Complete with Lens Protection Film

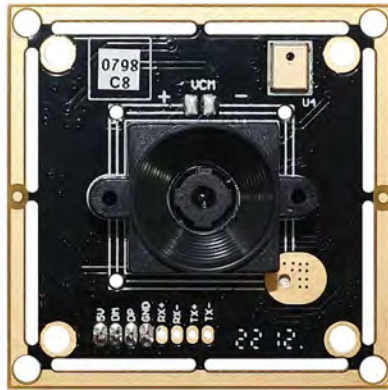

Place Camera Sample into Anti-Static Bag

Place USB Cameras into Tray



Seal the Tray with Anti-Static Bag

Label the Carbon Shipping Box



## YDSCAM Package Solutions

Place Camera Sample into Anti-Static Bag



Place Connectors into Anti-Static Bag



Label the Sample Bags



Place Connectors into Reel



Place Samples into the Carbon Box



Place Connectors into the Carbon Box





# YDS CAMERA MODULE


*your best camera partner*

## Company YDSCAM

YingDeShun Co. Ltd. (YDS) was established in 2017, a next-generation technology driven manufacturer specialized in research, design, and produce of audio and video products. YDS is occupying 20,000 square feet automated plants with 100 employees of annual throughput 30,000,000 units cameras.

YDS provides OEM, ODM design, contract manufacturing, and builds the camera products. You may provide the requirements to us, even with a hand draft, our sales and engineering work together to meet your needs. We consider ourselves your last-term partner in developing practical and innovative solutions.

Our team covers everything from initial concept development to mass produced product. YDS specializes in customized camera design, raw material, electronic engineering, firmware/software development, product testing, and packing design. Our experienced strategic supply systems offer a robust and dependable manufacturing capacity for orders of various sizes.

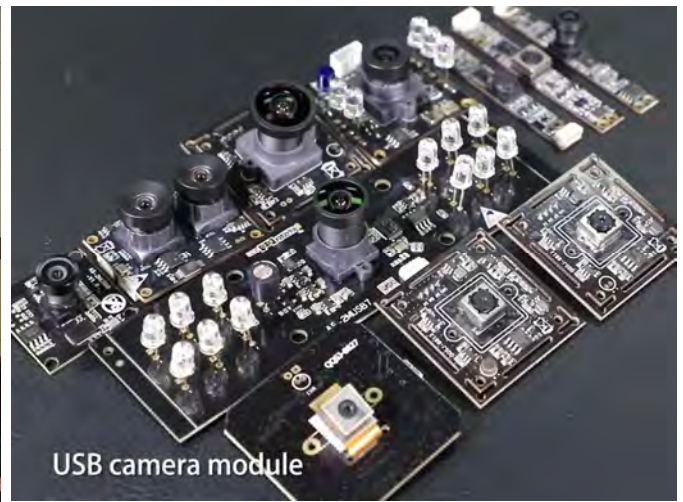

## Limited Warranty

YDS provides the following limited warranty if you purchased the Product(s) directly from YDS company or from YDS's website [www.YDSCAM.com](http://www.YDSCAM.com). Product(s) purchased from other sellers or sources are not covered by this Limited Warranty. YDS guarantees that the Product(s) will be free from defects in materials and workmanship under normal use for a period of one (1) year from the date you receive the product ("Warranty Period").

For all Product(s) that contain or develop material defects in materials or workmanship during the Warranty Period, YDS will, at its sole option, either: (i) repair the Product(s); (ii) replace the Product(s) with a new or refurbished Product(s) (replacement Product(s) being of identical model or functional equivalent); or (iii) provide you a refund of the price you paid for the Product(s).

This Limited Warranty of YDS is solely limited to repair and/or replacement on the terms set forth above. YDS is not reliable or responsible for any subsequent events.



[www.YDSCAM.com](http://www.YDSCAM.com) [sales@ydscom.com](mailto:sales@ydscom.com) Phone (WeChat, QQ): (+86) 177 2732 6718

All rights reserved @ YingDeShun Co. Ltd. Specifications subject to change without notice.



# YDS CAMERA MODULE

*your best camera partner*

## YDS Strength

### Powerful Factory



### Professional Service



### Promised Delivery



[www.YDSCAM.com](http://www.YDSCAM.com) [sales@ydscam.com](mailto:sales@ydscam.com) Phone (WeChat, QQ): (+86) 177 2732 6718

All rights reserved @ YingDeShun Co. Ltd. Specifications subject to change without notice.